

Durable Material

- High corrosion resistance
- Best hydrostatic seal in the industry
- Strongest coupling in the industry

Innovative Design


- FM approved and pressure rated
- High tolerance for pipe-to-fitting diameter
- Gasket is a sure fit every time
- Prevents failure due to shear, deflection or vibration



Engineering & Ordering Info

Selecting the correct Clamp-All® coupling for your project is easy.

- Identify the pipe size you need from the chart. Inches and millimeter dimensions are indicated for your convenience.
- Confirm the installed dimension. The “Installed Dimension” columns “A” and “B” on the chart are the side and bottom parameters as shown in the illustration.

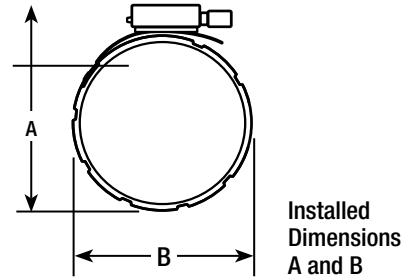

Pipe Size		Part Numbers		Installed Dimension				Depth to Center Stop		Width of Coupling	
		HI-TORQ 80	HI-TORQ 125	A		B					
in.	(mm)	NDS Part #	Brand PN	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)
1.5	(38)	81015	10015	2.75	(70)	2.25	(57)	1.44	(37)	3	(75)
2	(50)	81020	10020	3.25	(83)	2.75	(70)	1.44	(37)	3	(75)
3	(75)	81030	10030	4.25	(108)	3.75	(95)	1.44	(37)	3	(75)
4	(100)	81040	10040	5.25	(133)	4.75	(121)	1.44	(37)	3	(75)
5	(125)	81050	10050	6.25	(159)	5.75	(146)	1.94	(49)	4	(100)
6	(150)	81060	10060	7.25	(184)	6.75	(171)	1.94	(49)	4	(100)
8	(200)	81080	10080	9.25	(184)	8.75	(222)	1.94	(49)	4	(100)
10	(250)	81100	10100	11.50	(292)	11.00	(279)	1.94	(49)	4	(100)
12	(300)	N/A	10120	13.50	(338)	13.00	(325)	2.76	(69)	5.62	(141)
15	(375)	N/A	10150	17.25	(431)	16.75	(419)	2.76	(69)	5.62	(141)

Transition Bushings

- Snap-All transitions bushings are available in all sizes
- Easiest way to make transitions from pipes to different diameters or materials

Specifications

Clamp-All HI-TORQ 80 and HI-TORQ 125 couplings are designed and suitable for use with hubless cast iron pipe and fittings conforming to ASTM A-888 for all storm and sanitary DWV piping systems above and below grade. Clamp-All Couplings are suitable for joining Cast Iron to Plastic, Steel or Copper pipe in all storm or sanitary drains, waste and vent piping applications. Clamp-All coupling, in conjunction with Snap-All® bushings, are suitable for joining different diameters and materials in all DWV piping applications.

Approvals & Listings

IAPMO



Listed by
IAPMO - #2189

SBCCI



SBCCI Evaluation Report
#9488 for Code
Compliance

ASTM



Conforms to:
ASTM A-666
ASTM C-564

Visit ndspro.com for:



Videos



Tools/
Calculators



Downloads



Case
Studies



Request
a Quote

NDS Customer Service

851 N. Harvard Ave., Lindsay, CA 93247
Phone: 800.726.1994 · 559.562.9888
Fax: 800.726.1998 · 559.562.4488