


TUFFTRACK® GRASSROAD PAVERS

Tufftrack® Grassroad Pavers® are a honeycomb cell paver product that allows light to heavy vehicular traffic to drive over turf areas. It prevents soil compaction, allowing healthy root growth. It may also be used for erosion control. A tongue and groove latching system provides quick and secure connections between the pavers without the need of additional tools or parts. Tufftrack® Grassroad Pavers' top smooth surface eliminates sharp corners, reducing liability to pedestrians. Tufftrack® Grassroad Pavers® are the ultimate product for promoting healthy turf in traffic areas as an alternative to aesthetically unpleasant concrete or asphalt pavements.

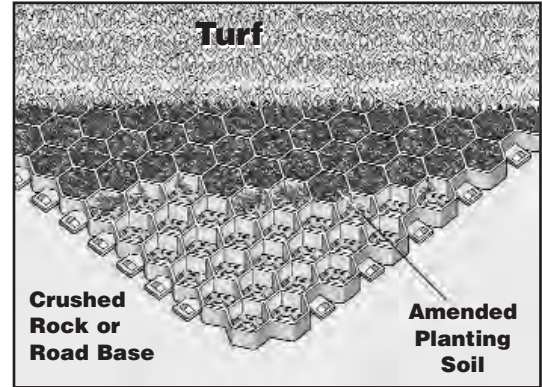

Specifications: Paver shall be Tufftrack® Grassroad Pavers® honeycomb cell paver system by NDS. The Paver must be 4 Sq. Ft. per section and be void of any surface notches. The Paver shall have seven openings in the base of each cell. Exterior tongue and groove latching system must be present, not requiring additional pieces and tools. Material must be made of up to 100% Post consumer High Impact Polypropylene (HIPP). Material must contain U.V. Inhibitors for longevity. Paver must have an ultimate compression load rating of 98,500 psf "empty."

	Part No.	Description	Color	Pkg. Qty. Pallet Qty.	Weight (Ea)	Product Class
	TT-24	24" x 24" Tufftrack® Grassroad Pavers®	Black	1/132	4.00	55GP

HEAVY LOAD AND FIRELANE ACCESS


There are two primary methods of grass treatment for fire lane and heavy vehicular access roads. The first method of planting is illustrated in the detail directly below and is the most popular. The sod or finished grass surface is above the paving grid work. Fire lanes are generally designated for emergency traffic only and therefore do not need an exposed driving surface.

LIGHT TO MODERATE WEIGHT —


UTILITY, GOLF, RV, SERVICE ACCESS

A 4" deep tilled and rolled paver planting bed is an excellent treatment for moderate weight vehicular traffic up to 6-8 tons. The soil level is 3/8" below the top of the paver. This is ideal for seeding, hydro-seeding and stolons. This planting illustration is specifically designed for vehicular traffic and will encourage rapid grass growth regeneration.

HEAVY LOAD AND FIRELANE ACCESS

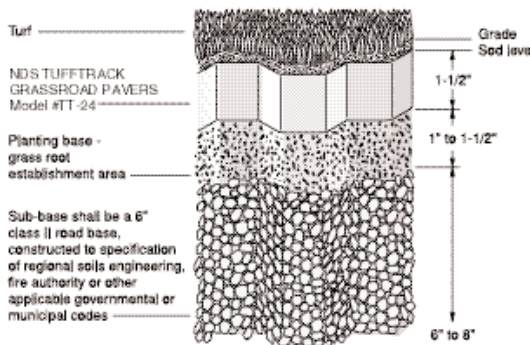

LIGHT TO MODERATE WEIGHT - UTILITY, GOLF, RV, SERVICE ACCESS

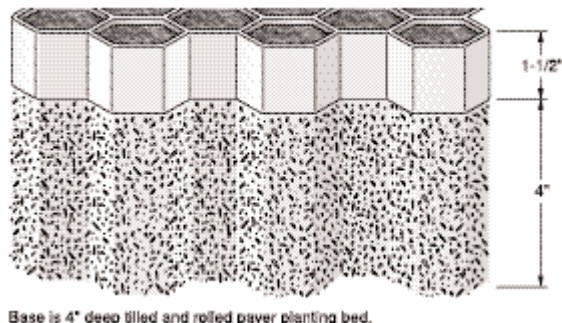

Note: All dimensions are nominal. All weights are for shipping purposes only. Availability is subject to change.