

TUFFTRACK PRODUCT DESCRIPTION


PANEL SIZE - 24" x 24" x 1 1/2"

CELLS PER PANEL - (120) - 2-1/2" HEXAGONAL CELLS

NESTED HONEYCOMB CELL LAYOUT

COMPRESSIVE STRENGTH - 98,770 PSF
685 PSI
EXCEEDS H2O
LOADING

NOTE:
SOIL SEPARATOR MAY BE REQUIRED
ABOVE STONE BASE MATERIAL IF USING
AGGREGATE WITH A HIGH VOID RATIO

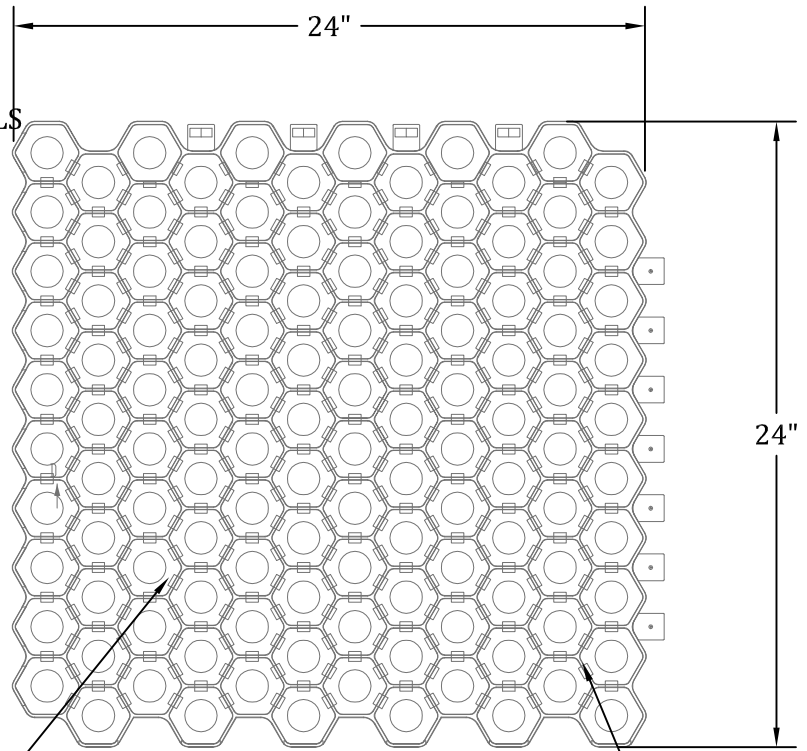

TONGUE & GROOVE LATCHING SYSTEM


TUFFTRACK GRASS ROAD PAVER

"SOD" PLANTING LEVELS INSIDE CELLS

PAVER GRIDWORK FINISH GRADE

ADJOINING FINISH GRADE

TOP OF SOD AFTER
SETTLING INTO CELLS

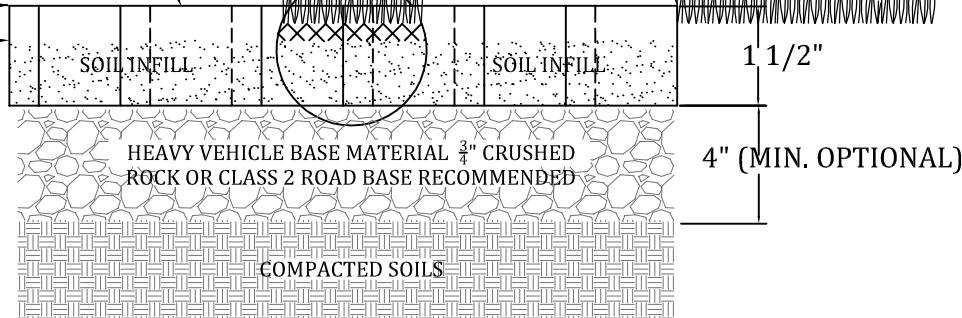

NOTE:

EXISTING SOILS SHOULD BE EVALUATED TO ENSURE
PROPER STRUCTURAL AND PERMEABILITY PROPERTIES.



TECHNICAL SERVICES
1-888-825-4716
techservice@ndspro.com

TYPICAL TUFFTRACK PAVER DETAIL

LIGHT LOAD TRAFFIC AREA

N. T. S.