




**WHITE PVC ADJUSTABLE SPRING CHECK VALVE**

RATED @200 PSI STATIC PRESSURE @ 72°F  
 MOLDED IN THE USA  
 MADE OF PVC TYPE I MATERIAL  
 STAINLESS STEEL SPRING  
 EPDM WASHERS & O-RING

NSF/ANSI 61 + 372 LISTED

ADJUSTING NUT 1 TURN = 0.50 LBS FORCE  
 FACTORY SET AT 5#  
 1205-07-20 PRE-SET AT 20#

IPS FPT X IPS FPT  
 IPS—IRON PIPE SIZE (SAME AS SCHEDULE 40)  
 FPT—FEMALE PIPE THREAD

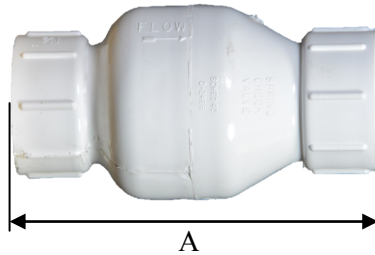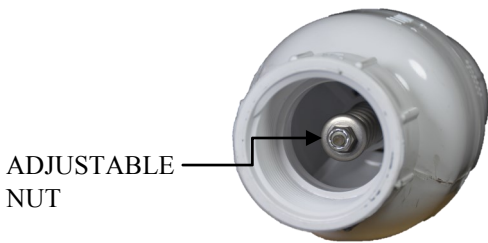

PART NUMBER	SPRING TENSION	A (INCHES)	B (INCHES)	WEIGHT (LBS)	IPS CONNECTION SIZE
1205-05	2 TO 5 LBS	4.15	1.76	0.20	1/2" IPS
1205-07	2 1/2 TO 5 LBS	4.15	1.76	0.20	3/4" IPS
1205V07	2 1/2 TO 5 LBS				
1205-07-20	20 LBS				
1205-10	4 1/8 TO 17 LBS	5.21	2.31	0.40	1" IPS
1205-12	4 TO 50 LBS	6.09	3.16	0.75	1 1/4" IPS
1205-15	3 1/2 TO 50 LBS	5.94	3.20	0.75	1 1/2" IPS
1205-20	1 3/4 TO 14 1/2 LBS	7.51	4.07	1.45	2" IPS

NOTES: 1205V07 CONTAINS A VITON O-RING AND IS NOT NSF/ANSI 61+372 LISTED  
 ADJUSTING NUT 1 TURN ON PART 1205-07-20 = 3.75 LBS FORCE