


NDS, INC. 851 NORTH HARVARD AVE. LINDSAY, CA 93247

TOLL FREE: 1-800-726-1994 PHONE: (559) 562-9888 FAX: (559) 562-4488 www.ndspro.com

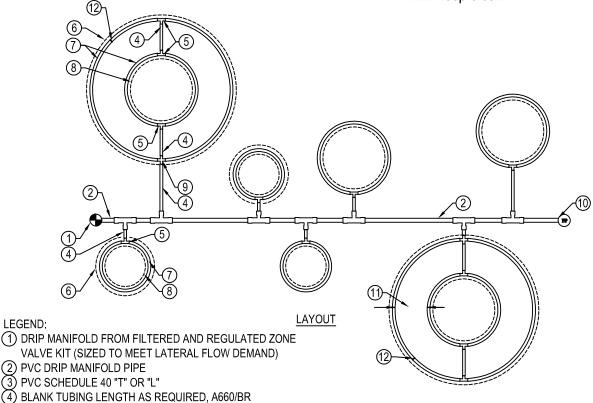

- 7) ON-SURFACE DRIP LINE, DURA FLO CV (8) ROOTBALL (TYPICAL)
- (9) BARB X BARB INSERT "X"=CR17
- (10) FLUSH POINT, CEP18 (TYPICAL)

(5) BARB X BARB INSERT "T"=T17

(6) PROJECTED CANOPY LINE OF TREE OR SHRUB

- (11) SPACING PER SPECIFICATION
- (12) TIE DOWN STAKE, S8

## NOTES

- 1. INSTALL MULTIPLE RINGS AS REQUIRED TO PROVIDE COVERAGE FROM ROOTBALL TO PROJECTED TREE CANOPY. REFER TO DESIGN GUIDELINES FOR RECOMMENDED SPACING BETWEEN RINGS.
- 2. PLACE TIE-DOWN STAKES EVERY 3'-0" O.C. IN SAND, 4'-0" O.C. IN LOAM AND 5'-0" IN CLAY SOILS.
- 3. AT FITTINGS WHERE THERE IS A CHANGE OF DIRECTION SUCH AS TEES OR ELBOWS, USE TIE-DOWN STAKES ON EACH LEG OF THE CHANGE OF DIRECTION.
- 4. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- 5. DO NOT SCALE DRAWING.
- 6. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY.
- 7. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.

