


NDS, INC. 851 NORTH HARVARD AVE. LINDSAY, CA 93247

TOLL FREE: 1-800-726-1994 PHONE: (559) 562-9888 FAX: (559) 562-4488 www.ndspro.com

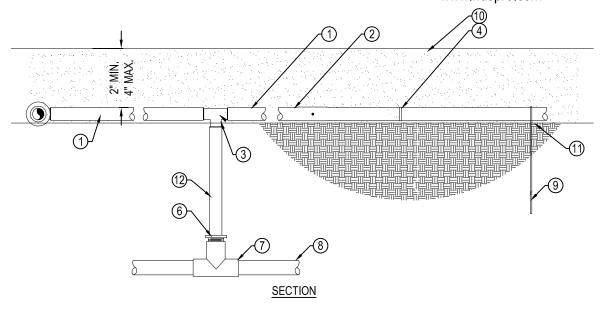

LEGEND:

- (1) ON SURFACE DRIP LINE, DURA-FLO CV
- (2) INLINE DRIP EMITTER OUTLET
- (3) BARB "T" FITTING, T17
- (4) BARB COUPLING FITTING, C17
- (5) BARB "L" FITTING, EL17
- (6) BARB X MALE FITTING, 1/2" BTMA 1750 1/4"BTMA 1775
- (7) PVC "T" SLIP, SLIP. THREAD
- (8) PVC LATERAL SUPPLY HEADER
- (9) TIE DOWN STAKE, S8
- (10) MULCH
- (11) FINISH GRADE
- (12) BLANK TUBING LENGTH AS REQUIRED, A660/BR

<u>NOTES</u>

- 1. PLACE TIE-DOWN STAKES EVERY 3'-0" O.C. IN SAND, 4'-0" O.C. IN LOAM AND 5'-0" O.C. IN CLAY SOILS.
- 2. AT FITTINGS WHERE THERE IS A CHANGE OF DIRECTION SUCH AS TEES OR ELBOWS, USE TIE-DOWN STAKES ON EACH LEG OF THE CHANGE OF DIRECTION
- 3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- 4. DO NOT SCALE DRAWING.
- 5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY.
- 6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.

