


NDS 12X17 AMR / TR METER COVER

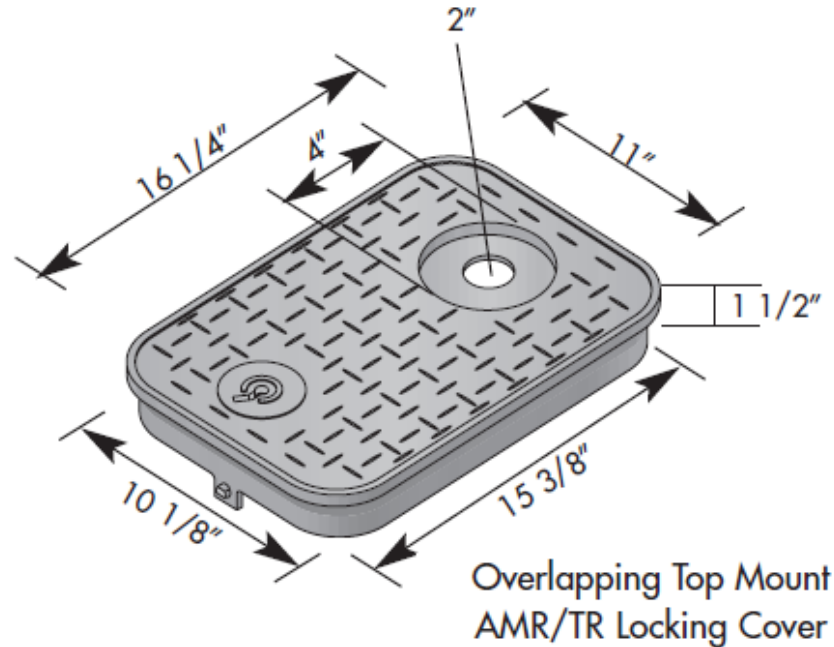

Part# D12AMR-OLLOCTRL

COLOR: BLACK

MATERIAL : HDPE

RECYCLED CONTENT: 100% (50% POST-CONSUMER & 50% POST INDUSTRIAL)

Properties of Unfoamed Resin

	ASTM Test Method	Polyolefin
Tensile Strength, Yield	ASTM D 638	3100-4400 PSI
Density	ASTM D 792	.900-.956
Notched Izod Impact Strength	ASTM D 256	4-15 ft. lbs/in.
Heat Deflection Temperature @ 66 PSI, Degrees F.	ASTM D 648	165-212 degrees F.



Class A

- Loads of 1-60 psi.
- Recommended for pedestrians, bicycles and wheel chair traffic.