




## TECHNICAL SPECIFICATION

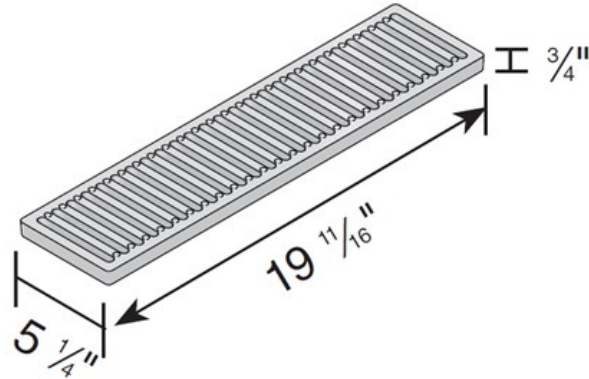

PART NUMBER	SIZE	SLOT WIDTH	LOAD CLASS	OPEN AREA FLOW RATE W/ 1/2" HEAD	WEIGHT	ADA	HEEL PROOF
823	5-1/4" X 19-11/16 X 3/4"	5/16" X 3-9/16"	C	22.90 IN <sup>2</sup> / LINEAR FOOT 70 GPM / LF	12.30 LBS	YES	NO


**SPECIFICATION:**

MATERIAL: DUCTILE IRON

LOAD CLASS C— LOADS BETWEEN 176-325PSI, RECOMMENDED FOR HEAVY DUTY PNEUMATIC TIRE FORKLIFTS AND TRACTOR-TRAILERS AT SPEEDS LESS THAN 20 MPH. H-20 RATED.

REQUIRES #829 STAINLESS STEEL SCREWS (4 PER GRATE)

FITS 5" PRO SERIES CHANNEL



### 5" PRO SERIES GRATE

DUCTILE IRON "SLOTTED"

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT [techservice@ndspro.com](mailto:techservice@ndspro.com)