


PROJECT NAME:

FILE #

TS_PS_5IN_POLY_SLOTTED_LOAD B



TECHNICAL SPECIFICATION

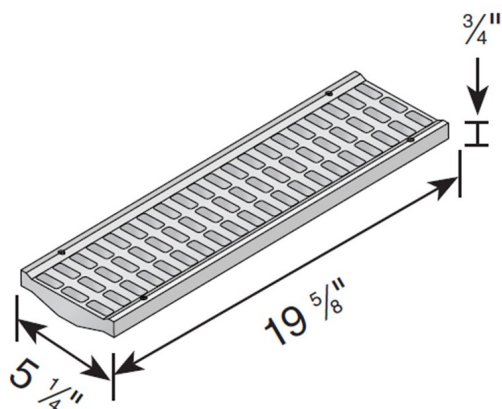

PART NUMBER	SIZE	SLOT WIDTH	LOAD CLASS	OPEN AREA FLOW RATE W/ 1/2" HEAD	WEIGHT	ADA	HEEL PROOF
814(LIGHT GRAY)	5-1/4" X 19-5/8" X 3/4"	1/2" X 1-1/4"	B	23.52 IN ² / LINEAR FOOT 71.95 GPM / LF	1.16 LBS	YES	NO
815 (GREEN)	5-1/4" X 19-5/8" X 3/4"	1/2" X 1-1/4"	B	23.52 IN ² / LINEAR FOOT 71.95 GPM / LF	1.16 LBS	YES	NO
816 (BLACK)	5-1/4" X 19-5/8" X 3/4"	1/2" X 1-1/4"	B	23.52 IN ² / LINEAR FOOT 71.95 GPM / LF	1.16 LBS	YES	NO
817 (SAND)	5-1/4" X 19-5/8" X 3/4"	1/2" X 1-1/4"	B	23.52 IN ² / LINEAR FOOT 71.95 GPM / LF	1.16 LBS	YES	NO
818(BRICK RED)	5-1/4" X 19-5/8" X 3/4"	1/2" X 1-1/4"	B	23.52 IN ² / LINEAR FOOT 71.95 GPM / LF	1.16 LBS	YES	NO
819 (WHITE)	5-1/4" X 19-5/8" X 3/4"	1/2" X 1-1/4"	B	23.52 IN ² / LINEAR FOOT 71.95 GPM / LF	1.16 LBS	YES	NO

SPECIFICATION:


MATERIAL: PVC WITH UV INHIBITORS

LOAD CLASS B— LOADS BETWEEN 61-175 PSI, RECOMMENDED FOR MEDIUM-DUTY PNEUMATIC TIRE TRAFFIC, AUTOS AND LIGHT TRUCKS AT SPEEDS LESS THAN 20 M.P.H.

REQUIRES #829 STAINLESS STEEL SCREWS (4 PER GRATE)

FITS 5" PRO SERIES CHANNEL

MADE IN THE USA



5" PRO SERIES GRATE

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com, DESIGN ASSISTANCE- designworx@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994