




TECHNICAL SPECIFICATION

NDS-FILCOTEN 4 INCH STAINLESS STEEL LONGITUDINAL BAR GRATE

17010330,1

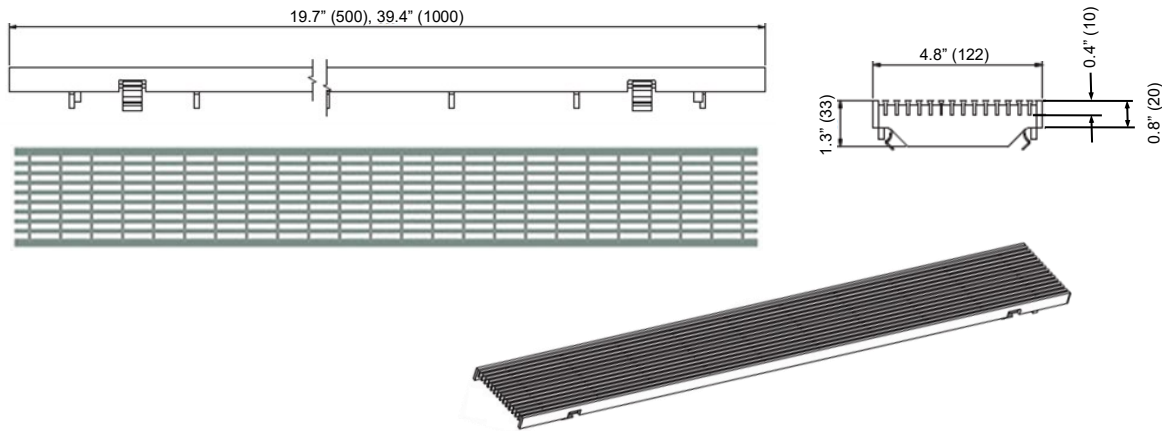

PART NUMBER	SIZE	SLOT WIDTH	LOAD CL DIN	INLET AREA / METER		WEIGHT	ADA	HEEL PROOF
				FLOW RATE W 1/2" HEAD				
<input type="checkbox"/> 17010330 Standard Stock	4.8 x 39.4 inch (122 x 1000 mm)	0.23 in. (6 mm)	B 125 kN	INLET AREA / m 60.5 inch ² (390 cm ²)		7.5 lbs (3.4 kg)	YES	YES
<input type="checkbox"/> 17010331 Non Stock MTO	4.8 x 19.7 inch (122 x 500 mm)	0.23 in. (6 mm)	B 125 kN	FLOW RATE / m 185.3 gpm [0.41 cfs] (11.7 LPS)				

SPECIFICATION:


NDS FILCOTEN PRO NW100, MEDIUM DUTY (LOAD CLASS B 125 kN), STAINLESS STEEL LONGITUDINAL BAR GRATE IS 4.80" (122 mm) WIDE, LIGHT PNEUMATIC TIRE TRAFFIC, RESIDENTIAL PARKING, SIDEWALKS.

DIN CLASS B 125 kN LOAD RATED – 28,100 LBS LIGHT PNEUMATIC TIRE TRAFFIC, RESIDENTIAL PARKING, SIDEWALKS. STAINLESS STEEL MANUFACTURED AND TESTED IN ACCORDANCE TO EN1433

EACH GRATE IS SECURED TO THE BODY WITH FOUR POINT SNAP-IN LOCKING SYSTEM. OPTIONAL ANTI-VANDAL CLIP MAY BE SPECIFIED TO PREVENT THEFT.

USE WITH FILCOTEN NW100 4-INCH CHANNEL BODY
USE 1 GRATE PER METER OR 2 HALF-METERS AS SPECIFIED

FILCOTEN[®]
a brand of BG



FILCOTEN NW100 LONGITUDINAL BAR GRATE

4 INCH / ADA / HEELPROOF / STAINLESS STEEL / DIN CLASS B 125kN

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com