

PROJECT NAME:

MTO



FILE #

TS_FC_NW100_GRATE_SS_PERF_ADA_HP_LOAD C



TECHNICAL SPECIFICATION

NDS-FILCOTEN 4 INCH PERFORATED STAINLESS STEEL 17010328, 329

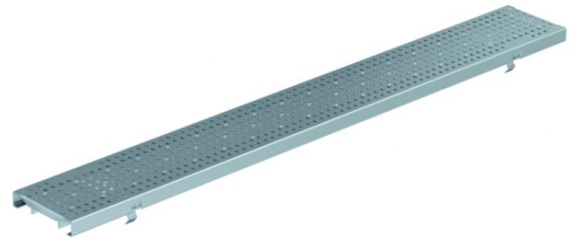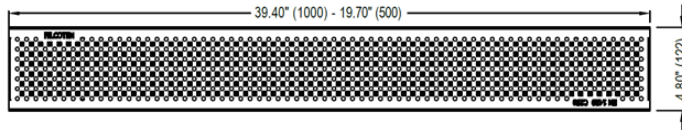

PART NUMBER	SIZE	SLOT WIDTH	LOAD CL DIN	INLET AREA / METER	WEIGHT	ADA	HEEL PROOF
				FLOW RATE W 1/2" HEAD			
17010328 Non Stock MTO	4.8 x 39.4 inch (122 x 1000 mm)	0.25" (6 mm)	C 250 kN	20.77 inch ² /m (134 cm ² /m)	4.19 lbs (1.9 kg)	YES	YES
17010329 Non Stock MTO	4.8 x 19.7 inch (122 x 500 mm)	0.25" (6 mm)	C 250 kN	63.6 gpm/m [0.14 cfs/m] (4.01 LPS/m)	2.2 lbs (1.0 kg)	YES	YES

SPECIFICATION:


NDS FILCOTEN PRO NW100, PERFORATED STAINLESS STEEL GRATE, HEAVY DUTY (LOAD CLASS C 250 kN), EITHER 4.8" WIDE X 39.4" LONG (122 X 1000 mm) OR 4.8" WIDE X 19.7" LONG (122 X 500 mm), 0.78" (20 mm) HIGH. PERFORATIONS ARE 0.25" (6 mm) DIAMETER, ADA AND HEELPROOF COMPLIANT.

DIN CLASS C 250 kN LOAD RATED - 56,200 LBS HEAVIER COMMERCIAL APPLICATIONS.
304 STAINLESS STEEL GRATE IS MANUFACTURED AND TESTED IN ACCORDANCE TO EN1433

EACH HALF METER GRATE IS SECURED TO THE BODY WITH FOUR POINT SNAP-IN LOCKING SYSTEM.
OPTIONAL ANTI-VANDAL CLIP MAY BE SPECIFIED TO PREVENT THEFT.

USE WITH FILCOTEN NW100 4 INCH CHANNEL BODY
USE 1 FULL OR 2 HALF METER GRATES PER METER

FILCOTEN[®]
a brand of BG



FILCOTEN NW100 PERFORATED GRATE

4 INCH / ADA / HEELPROOF / STAINLESS STEEL/ DIN CLASS C 250 kN

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com, DESIGN ASSISTANCE- designworx@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994, OPTION '3'