




TECHNICAL SPECIFICATION

NDS-FILCOTEN 4-INCH PAVER SLOT TOP, GALV. STEEL—17111204, 205, 206

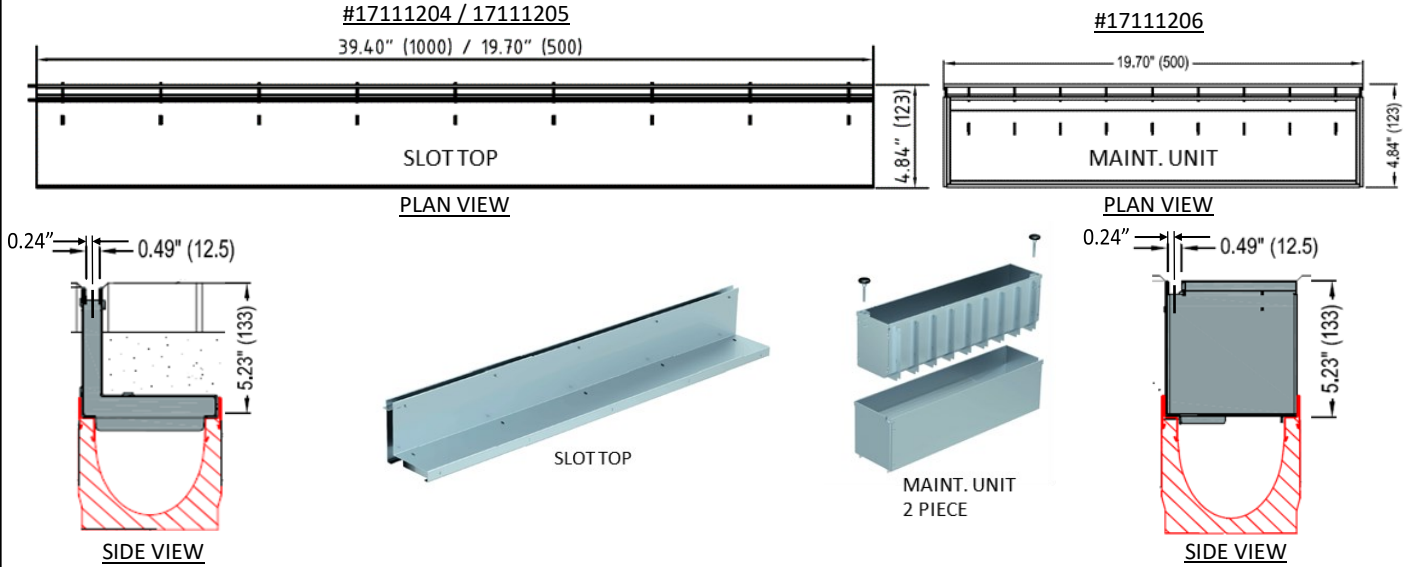

	PART NUMBER	SIZE	SLOT WIDTH	LOAD CL DIN	INLET AREA / METER		WEIGHT	ADA	HEEL PROOF
					FLOW RATE W 1/2" HEAD				
○	17111204 SLOT TOP	39.4"L x 4.84"W x 5.23"H (1000 x 123 x 133 mm)	0.24" (6 mm)	C 250 kN	18.6 inch ² /m (120 cm ² /m)		12.8 lbs (5.8 Kg)	YES	YES
○	17111205 SLOT TOP	19.7"L x 4.84"W x 5.23"H (500 x 123 x 133 mm)	0.24" (6 mm)	C 250 kN	57 gpm/m		6.6 lbs (3.0 Kg)	YES	YES
○	17111206 MAINT. UNIT	19.7"L x 4.84"W x 5.23"H (500 x 123 x 133 mm)	0.24" (6 mm)	C 250 kN	[0.13 cfs/m] (3.6 LPS/m)		11.7 lbs (5.3 Kg)	YES	YES

PRODUCT FEATURES


- DIN CLASS C 250 kN LOAD RATED - 56,200 LBS COMMERCIAL APPLICATIONS.
- GALVANIZED STEEL MANUFACTURED AND TESTED IN ACCORDANCE TO EN1433
- ADA AND HEELPROOF COMPLIANT.

INSTALLATION:

- TRENCH DRAIN SYSTEM AND SLOT TOPS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS INSTALLATION INSTRUCTIONS AND RECOMMENDATIONS.

SPECIFICATION:

NDS FILCOTEN PAVE SLOT TOP FOR 4" NW100 TRENCH DRAINS, (LOAD CLASS DIN C 250 kN), GALVANIZED STEEL. THE REINFORCED SLOT TOP IS 4.84" (123 mm) WIDE, FULL METER 39.40" (1000 mm) OR HALF-METER 19.70" (500 mm) LONG, 5.23" (133 mm) HIGH. FILCOTEN PAVE MAINTENANCE UNIT HAS TWO SLOTS 0.24 INCHES (6 mm) WIDE. USE WITH FILCOTEN NW100 4 INCH (100 mm) CHANNEL BODY. RECOMMENDED TO USE A MINIMUM OF 2 MAINTENANCE UNITS PER RUN AND 2 LIFTING KNOBS (PART #13399)



FILCOTEN NW100 SLOT TOP / MAINT. UNIT

4 INCH / ADA / *HEELPROOF GALVANIZED STEEL / LOAD CLASS C 250kN

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994, OPTION '3'