

PROJECT NAME:


FILE #

TS_FC_NW100_GRATE_SLOT TOP_SS_ADA_HP_MAINT



TECHNICAL SPECIFICATION

NDS-FILCOTEN 4-INCH PAVER SLOT TOP, STAINLESS STEEL—17111304, 305, 306

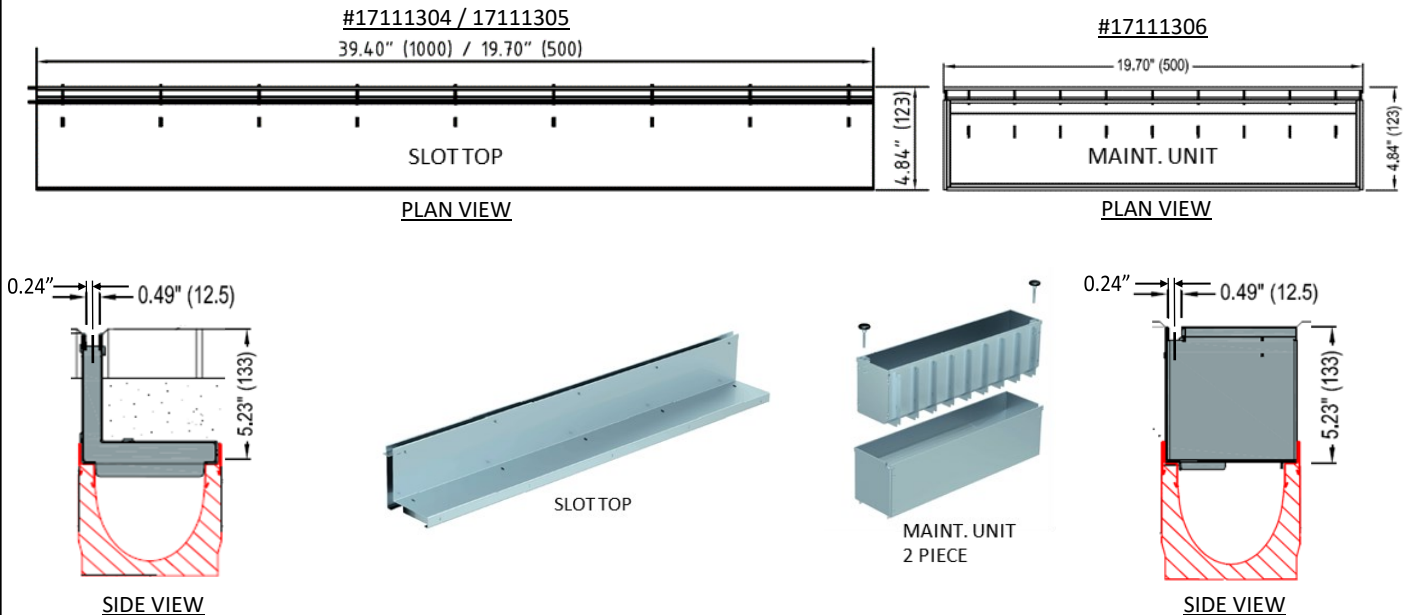

PART NUMBER	SIZE	SLOT WIDTH	LOAD CL DIN	INLET AREA / METER	WEIGHT	ADA	HEEL PROOF
				FLOW RATE W 1/2" HEAD			
○ 17111304 SLOT TOP	39.4"L x 4.84"W x 5.23"H (1000 x 123 x 133 mm)	0.24" (6 mm)	C 250 kN	18.6 inch ² /m (120 cm ² /m)	12.8 lbs (5.8 Kg)	YES	YES
○ 17111305 SLOT TOP	19.7"L x 4.84"W x 5.23"H (500 x 123 x 133 mm)	0.24" (6 mm)	C 250 kN		6.6 lbs (3.0 Kg)	YES	YES
○ 17111306 MAINT. UNIT	19.7"L x 4.84"W x 5.23"H (500 x 123 x 133 mm)	0.24" (6 mm)	C 250 kN	57 gpm/m [0.13 cfs/m] (3.6 LPS/m)	11.7 lbs (5.3 Kg)	YES	YES

SPECIFICATION:


NDS FILCOTEN NW100, (LOAD CLASS DIN C 250 kN), STAINLESS STEEL PAVER SLOT TOP GRATE AND MAINTENANCE UNIT. THE REINFORCED SLOT TOP IS 4.84" (123 mm) WIDE, FULL METER 39.40" (1000 mm) OR HALF-METER 19.70" (500 mm) LONG. THERE ARE TWO SLOTS, 0.24" (6 mm) WIDE — ADA AND HEELPROOF COMPLIANT.

LIFTING KNOBS—USE PART # 13399 (2 EACH) PER MAINTENANCE UNIT

DIN CLASS C 250 kN LOAD RATED - 56,200 LBS COMMERCIAL APPLICATIONS.
STAINLESS STEEL MANUFACTURED AND TESTED IN ACCORDANCE TO EN1433

USE WITH FILCOTEN NW100 4-INCH CHANNEL BODY
TYPICALLY USE 2 MAINTENANCE UNITS PER RUN

FILCOTEN[®]
a brand of BG



FILCOTEN NW100 SLOT TOP / MAINT. UNIT

4 INCH / ADA / HEELPROOF STAINLESS STEEL C 250kN

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994, OPTION '3'

Rev —08/17/2022