





TECHNICAL SPECIFICATION

NDS-FILCOTEN 8 INCH DUCTILE IRON GRATE 17020104

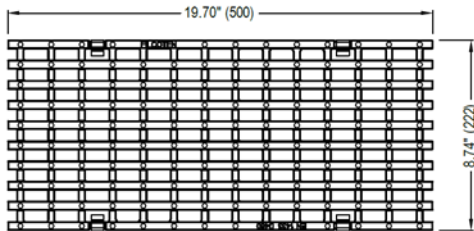

PART NUMBER	SIZE	SLOT WIDTH	LOAD CL DIN	INLET AREA / METER	WEIGHT	ADA	HEEL PROOF
				FLOW RATE W 1/2" HEAD			
17020104	8.7 x 19.7 inch (222 x 500 mm)	1.14" X 0.5" (29 x 13 mm)	D 400 kN	145.7 inch ² /m (940 cm ² /m)	7.5 lbs (3.6 kg)	YES	NO
				446.3 gpm/m [.99 cfs/m] (28.16 LPS/m)			

SPECIFICATION:


NDS FILCOTEN NW200 HEAVY DUTY (LOAD CLASS D 400 KN), DUCTILE IRON REINFORCED GRATE IS 8.74" (222MM) WIDE, 19.70" (500MM) LONG, 0.78" (20MM) HIGH. THE GRATE HAS 0.5" (13MM) WIDE, 1.14" (29MM) LONG MESH AND IS ADA COMPLIANT

DIN CLASS D 400 kN LOAD RATED – 89,920 LBS. FOR PNEUMATIC FORKLIFT TRAFFIC, ROADS AND HIGHWAYS. DUCTILE IRON MANUFACTURED AND TESTED IN ACCORDANCE TO EN1433

EACH HALF METER GRATE IS SECURED TO THE BODY WITH FOUR POINT SNAP-IN LOCKING SYSTEM. OPTIONAL ANTI-VANDAL CLIP MAY BE SPECIFIED TO PREVENT THEFT.

USE WITH FILCOTEN NW200 8-INCH CHANNEL BODY

FILCOTEN[®]
a brand of BG



FILCOTEN NW200 LONGITUDINAL BAR GRATE

8 INCH /ADA/ DUCTILE IRON / DIN CLASS D 400 kN

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994 "3", OPTION '3'