

PROJECT NAME:


FILE #

TS_FC_NW200_GRATE_DI_VIA_ADA_HP_LOAD D



TECHNICAL SPECIFICATION

NDS-FILCOTEN 8 INCH "VIA" DUCTILE IRON GRATE 17020184

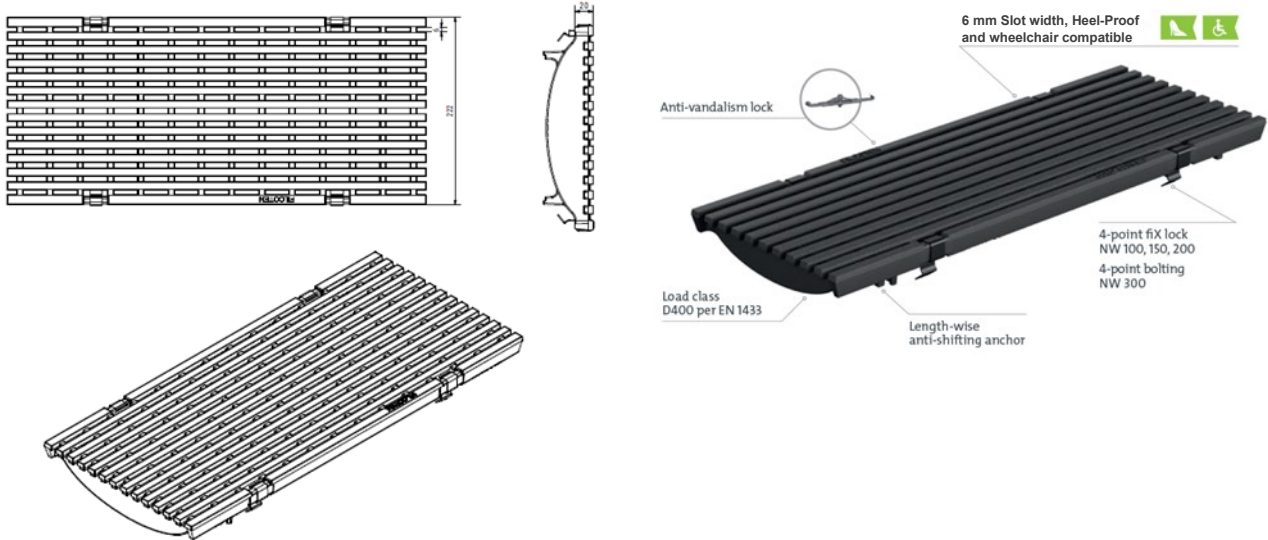

PART NUMBER	SIZE	SLOT WIDTH	LOAD CL DIN	INLET AREA / METER	WEIGHT	ADA	HEEL PROOF
				FLOW RATE W 1/2" HEAD			
17020184	8.7 x 19.7 inch (222 x 500 mm)	0.23" (6 mm)	D 400 kN	98 inch ² /m (633 cm ² /m) 300.2 gpm/m [0.67 gpm/m] (18.94 LPS/m)	18.52 lbs (8.4 kg)	YES	YES

SPECIFICATION:


NDS FILCOTEN NW200, HEAVY DUTY, (LOAD CLASS D400 KN), DUCTILE IRON, REINFORCED GRATE IS 8.74" (222 mm) WIDE, 19.70" (500 mm) LONG, 0.78" (20 mm) HIGH. THE VIA GRATE HAS 0.23" (6 mm) WIDE SLOTS, AND IS ADA AND HEELPROOF COMPLIANT.

DIN CLASS D 400 kN LOAD RATED – 89,920 LBS. FOR PNEUMATIC FORKLIFT TRAFFIC, ROADS AND HIGHWAYS. DUCTILE IRON MANUFACTURED AND TESTED IN ACCORDANCE TO EN1433

EACH HALF METER GRATE IS SECURED TO THE BODY WITH FOUR POINT SNAP-IN LOCKING SYSTEM. OPTIONAL ANTI-VANDAL CLIP MAY BE SPECIFIED TO PREVENT THEFT.

USE WITH FILCOTEN NW200 8 INCH CHANNEL BODY

FILCOTEN[®]
a brand of BG



FILCOTEN NW200 "VIA" GRATE

8 INCH /ADA/HEELPROOF/ DUCTILE IRON / DIN CLASS D 400 kN

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994, OPTION '3'