

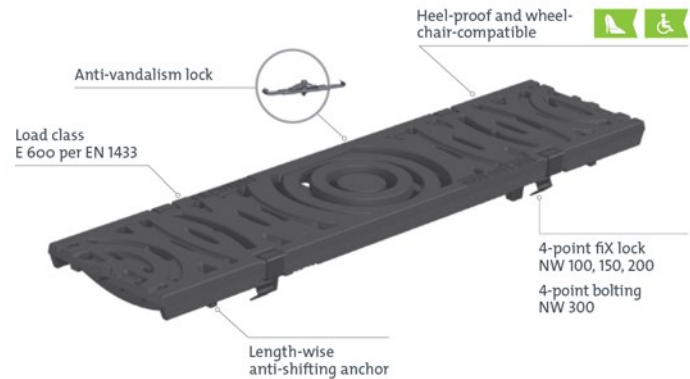


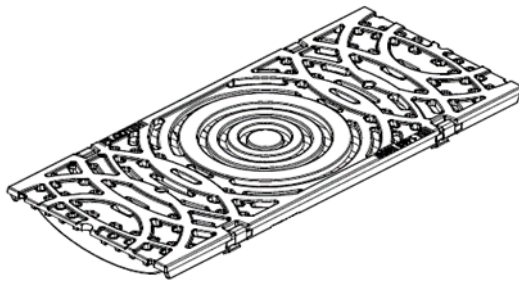

TECHNICAL SPECIFICATION

NDS-FILCOTEN 8 INCH "VILLE" DUCTILE IRON GRATE

17020180

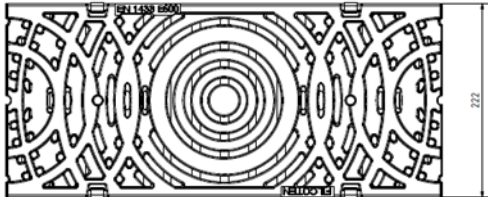

PART NUMBER	SIZE	SLOT WIDTH	LOAD CLASS DIN	INLET AREA / METER	WEIGHT	ADA	HEEL PROOF
				FLOW RATE W 1/2" HEAD			
17020180	8.7 x 19.7 inch (222 x 500 mm)	0.31 in. (8 mm)	E 600 kN	45.9 in ² /m (295 cm ² /m) 140.6 gpm/m [0.31 cfs/m] (8.87 LPS/m)	23.59 lbs (10.7 kg)	YES	YES

SPECIFICATION:


NDS FILCOTEN NW200, EXTRA HEAVY DUTY, (LOAD CLASS E 600 kN), DUCTILE IRON, REINFORCED GRATE IS 8.74" (222 mm) WIDE, 19.70" (500 mm) LONG, 0.78" (20 mm) HIGH. THE VILLE GRATE HAS 0.31" (8 mm) WIDE SLOTS — ADA AND HEELPROOF COMPLIANT.

DIN CLASS E 600 kN LOAD RATED- 134,800 LBS. FOR COMMERCIAL SOLID TIRE TRAFFIC PATTERNS, AND IMPACTS FROM STEEL STRUTS OR METAL WHEELS (FORKLIFTS). DUCTILE IRON MANUFACTURED AND TESTED IN ACCORDANCE TO EN1433

EACH HALF METER GRATE IS SECURED TO THE BODY WITH FOUR POINT SNAP-IN LOCKING SYSTEM. OPTIONAL ANTI-VANDAL CLIP MAY BE SPECIFIED TO PREVENT THEFT.

USE WITH FILCOTEN NW100 8-INCH CHANNEL BODY

FILCOTEN[®]
a brand of BG



FILCOTEN NW200 "VILLE" GRATE

8 INCH /ADA/HEELPROOF/ DUCTILE IRON / DIN CLASS E 600 kN

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994, OPTION '3'