




TECHNICAL SPECIFICATION

NDS-FILCOTEN 8 INCH PERFORATED GALVANIZED GRATE 17020228, 229

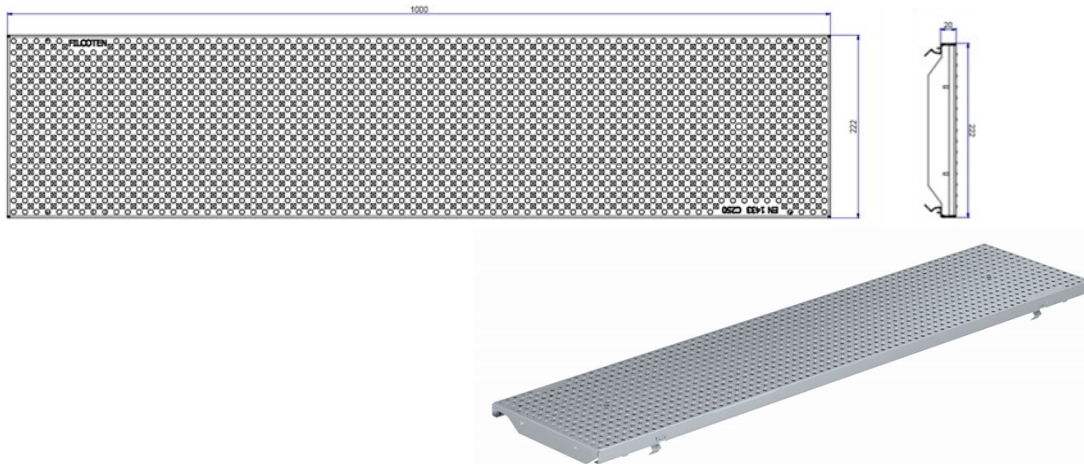

PART NUMBER	SIZE	SLOT WIDTH	LOAD CL DIN	INLET AREA / METER		WEIGHT	ADA	HEEL PROO F
				FLOW RATE W 1/2" HEAD				
17020228	8.74 x 39.4 inches (222 x 1000 mm)	0.25" HOLES (6 mm)	C 250 kN	44.6 inch ² /m (288 cm ² /m)		29.76 lbs (13.5 Kg)	YES	YES
17020229	8.74 x 19.7 inches (222 x 500 mm)	0.25" HOLES (6 mm)	C 250 kN	136.6 gpm/m [0.30 cfs/m] (8.62 LPS/m)		14.77 lbs (6.7 Kg)	YES	YES


SPECIFICATION:

NDS FILCOTEN NW200, HEAVY DUTY, (LOAD CLASS C 250 Kn), GALVANIZED STEEL, REINFORCED GRATE IS 8.74" (222 mm) WIDE, 39.40" (1000 mm) LONG OR [19.7" (500 mm)] AND 0.78" (20 mm) HIGH. THE GRATE HAS 1/4" (6 mm) DIAMETER HOLES — ADA AND HEELPROOF COMPLIANT.

DIN CLASS C 250 kN LOAD RATED—56,200 LBS FOR HEAVIER COMMERCIAL APPLICATIONS. MANUFACTURED AND TESTED IN ACCORDANCE TO EN1433.

EACH GRATE IS SECURED TO THE BODY WITH FOUR POINT SNAP-IN LOCKING SYSTEM. OPTIONAL ANTI-VANDAL CLIP MAY BE SPECIFIED TO PREVENT THEFT.

USE WITH FILCOTEN NW200 8 INCH CHANNEL BODY. CAN SPECIFY 1-METER OR 2 HALF-METER GRATES PER FULL CHANNEL



FILCOTEN NW200 PERFORATED GRATE

8 INCH / ADA / HEELPROOF / GALVANIZED STEEL / DIN CLASS C 250kN

FILCOTEN[®]
a brand of BG

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994, OPTION '3'