



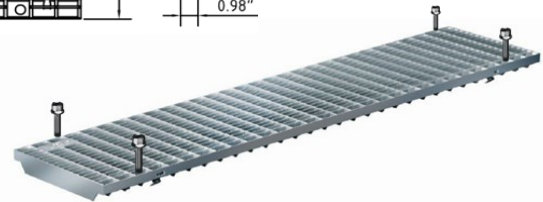

TECHNICAL SPECIFICATION

NDS-FILCOTEN 12-INCH GALVANIZED STEEL MESH GRATE

17030222. 223

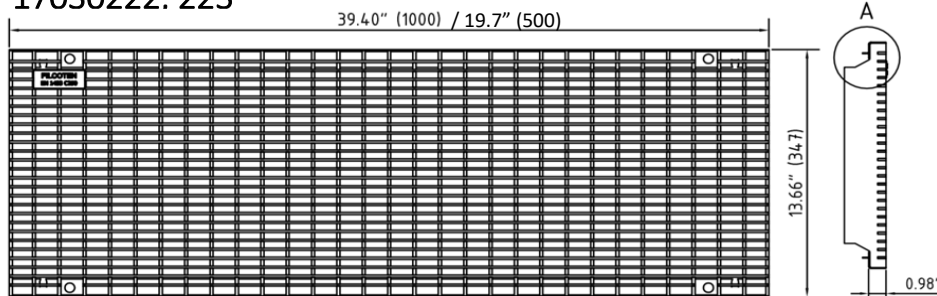

	PART NUMBER	SIZE	SLOT WIDTH	LOAD CL DIN	INLET AREA / METER		WEIGHT	ADA	HEEL PROOF
					FLOW RATE W 1/2" HEAD				
○	17030222	13.66 x 39.4 in (347 x 1000 mm)	0.39 X 1.18 in (10 X 30 mm)	C 250 kN	357.27 in ² /m (2,305 cm ² /m)	1094.5 gpm/m [2.44 cfs/m] (69.05 LPS/m)	50.92 lbs (23.1 Kg)	YES	NO
○	17030223	13.66 x 19.7 in (347 x 500 mm)	0.39 X 1.18 in (10 X 30 mm)	C 250 kN	355.72 in ² /m (2,295 cm ² /m)	1089.7 gpm/m [2.43 cfs/m] (68.75 LPS/m)	25.57 lbs (11.6 Kg)	YES	NO
○	32112								

SPECIFICATION:

- NDS FILCOTEN NW300, (LOAD CLASS C 250 kN), GALVANIZED STEEL, REINFORCED GRATE
 - 13.66 x 39.4 inches (347 x 1000 mm), 0.98 inches (25 mm) HIGH
 - 13.66 x 19.7 inches (347 x 5000 mm), 0.98 inches (25 mm) HIGH
 - MESH SLOT WIDTH IS 0.39 x 1.18 inches (10 x 30 mm)
- ADA COMPLIANT AND CLASS C LOAD RATED - FOR COMMERCIAL APPLICATIONS
- **DIN CLASS C**, 250 kN LOAD RATED - **56,200 LBS**, COMMERCIAL APPLICATIONS
MANUFACTURED AND TESTED IN ACCORDANCE TO **EN1433**
- THE GRATE IS SECURED TO THE BODY WITH A FOUR POINT BOLT SYSTEM
(SPECIFY NDS FILCOTEN CAGE BOLT [#32112](#), 4 BOLTS PER GRATE)
- USE WITH 12-INCH FILCOTEN NW300 CHANNEL BODY
- USE 1 METER OR 2 HALF-METER GRATES PER FULL CHANNEL

FILCOTEN[®]
a brand of BG

FILCOTEN NW300 GALVANIZED MESH GRATE

12 INCH /ADA/ GALVANIZED / DIN CLASS C, 250 kN

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994, OPTION '3'