




TECHNICAL SPECIFICATION

DURA SLOPE RADIUS COUPLING—DSRC

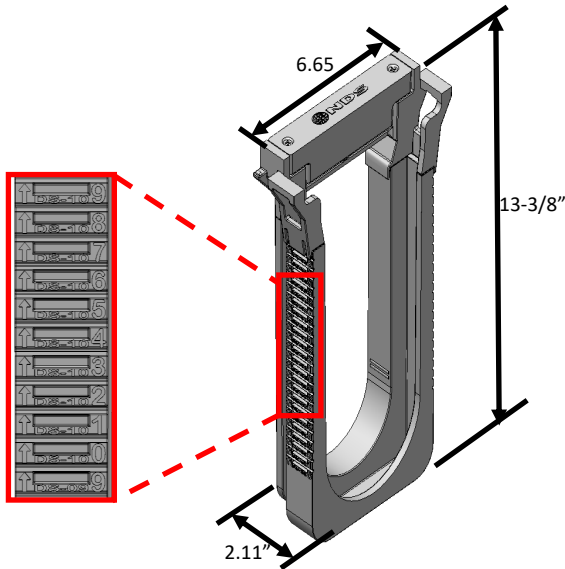

Easily Cut to Fit each
Dura Slope Channel

DSRC



DSRC-097, DSRC-100

PART NUMBER	SIZE	SLOT WIDTH	LOAD CLASS	OPEN AREA (BETWEEN GRATES)	WEIGHT (LBS)	ADA	HEEL PROOF
DSRC (COUPLING WITH SOLID GRATE)	6-5/8" x 13-3/8" x 2-1/8"	0.375" x 6"	B	2.25 IN ² / LF, 6.88 GPM / LF	1.10	YES	NO
DSRC-097	6-5/8" x 6-3/8" x 2-1/8"	0.375" x 6"	B	2.25 IN ² / LF, 6.88 GPM / LF	0.81	YES	NO
DSRC-100	6-5/8" x 7-3/8" x 2-1/8"	0.375" x 6"	B	2.25 IN ² / LF, 6.88 GPM / LF	0.82	YES	NO

SPECIFICATION:

MATERIAL: HIGH DENSITY POLYETHYLENE (HDPE) WITH UV INHIBITORS


LOAD CLASS B—LOADS OF 61-175 PSI. RECOMMENDED FOR MEDIUM DUTY-PNEUMATIC TIRE TRAFFIC, AUTOS AND LIGHT TRUCKS LESS THAN 20 MPH.

#DSRC IS ADJUSTABLE AND WILL FIT ALL DURA SLOPE CHANNELS INCLUDING DS-340.

DSRC-097 AND DSRC-100 WILL ONLY FIT THE NEUTRAL CHANNELS WITH THE SAME NUMBER:

DSRC-097 FITS DS-097N, DSRC-100 FITS DS-100N

FOR USE WITH THE RADIUS COUPLING GRATES



DURA SLOPE RADIUS COUPLING

DSRC

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com

851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994