





TECHNICAL SPECIFICATION

DURA SLOPE™ CAST IRON/DUCTILE IRON SLOTTED GRATE

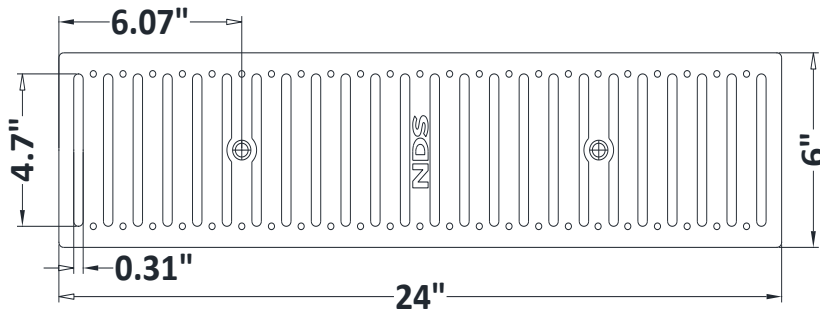

PART NUMBER (MATERIAL)	SIZE	SLOT WIDTH	LOAD CLASS	OPEN AREA FLOW RATE W/ 1/2" HEAD	WEIGHT (MATERIAL)	ADA	HEEL PROOF
DS-231(CAST IRON)	6" x 24" x 0.75"	.31" x 4.70"	C,D*	OPEN AREA—17.23 IN ² / LF	15.90LB (CI)	YES	YES
DS-232 (DUCTILE IRON)				FLOW RATE—53 GPM / LF	15.20LB (DI)		

SPECIFICATION:

MATERIAL: CAST IRON/DUCTILE IRON — 6" WIDE x 24" LONG x 0.75" HIGH


LOAD CLASS C—LOADS OF 176 - 325 PSI, RECOMMENDED FOR HEAVY DUTY PNEUMATIC TIRE FORKLIFTS AND TRACTOR-TRAILERS AT SPEEDS LESS THAN 20 M.P.H., H-20 RATED

***LOAD CLASS D** (REQUIRES DS-200H DUCTILE IRON FRAME) - LOADS OF 326-575 PSI. RECOMMENDED FOR HEAVY-DUTY HARD TIRE FORKLIFTS AT SPEEDS LESS THAN 20 M.P.H., H-20 RATED

REQUIRES (2) FH #1/4-20 x 1-1/2" SCREWS #629 (SUPPLIED WITH CHANNEL)

FITS ALL DURA SLOPE CHANNEL SECTIONS AND IN-LINE CATCH BASIN (DS-340)

TWO GRATES PER CHANNEL SECTION.



DURA SLOPE™ GRATE

CAST IRON/DUCTILE IRON SLOTTED GRATE - LOAD CLASS C, D*