



Delta™ Drip

Adjustable Drip Emitter (Registered Design)

FEATURES and BENEFITS

- Rotation of the key in the body adjusts the flow rate from 0 to 6 l/h at 100 kPa. Flow rate may be increased or decreased until final shut off.
- Turbulent flow path.
- Two key types available:
 1. End-Line Adjustable 0-6 l/h key. (**Black**)
 2. In-Line Adjustable 0-6 l/h key. (**Brown**)
- Two body types to choose from depending on application:
 1. Standard body with 4.5 mm inlet barb.
 2. Spike with 4.5 mm inlet barb.
- May be turned “**OFF**” when not in use.

APPLICATIONS


- May be used for vegetable patches, home gardens, nurseries, pots and shrubs.



PERFORMANCE DATA			
DRIPPERS		PRESSURE	FLOW
		(bar)	(l/h)
	Adjustable to 6 l/h at 1.0 bar	0.5	0 - 4.1
		0.75	0 - 5.1
		1.0	0 - 6.0
		1.25	0 - 6.8
		1.5	0 - 7.5
Recommended operating pressure 1.0 bar			

Delta™ Drip

Adjustable

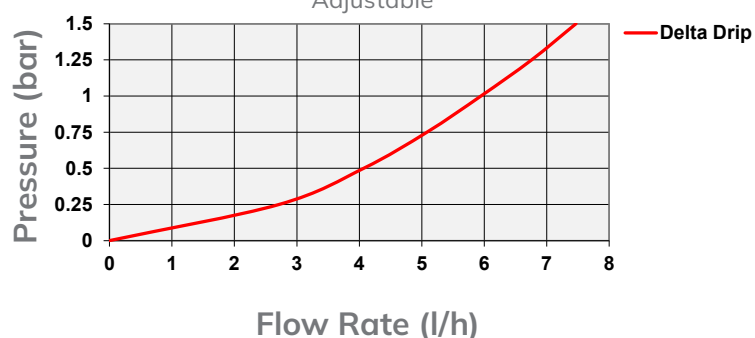

Delta™ Drip 4.5 mm
Barb End-Line



Delta™ Drip 4.5 mm
Barb In-Line

FILTRATION REQUIREMENTS

- Drip Emitters:
100 microns (150 mesh)

Delta™ Drip Emitters					
PACKAGING					
		Barb End-Line	Spike End-Line	Barb In-Line	Spike In-Line
Order Codes	Packs	200916	200904	203936	203944
	Bulk	020091	020090	020393	020394
Quantity per Bag	Packs	100	25	100	25
	Bulk	1000	1500	1000	1250
Bags per Carton	Packs	70	50	70	50
	Bulk	7	1	7	1
Weight per Carton (kg)	Packs	13.4	7.0	13.4	7.0
	Bulk	13.1	7.7	13.1	7.7
Base Inlet Connection		4.5 mm Barb			
Dimensions Assembled (mm)	Height	17	127	17	127
	Width	51	51	61	61
	Depth	9	10	9	10
	Weight (g)	1.72	4.63	1.8	4.7
Material		U.V. Stabilized			



Delta™ Drip Spike
End-Line



Delta™ Drip Spike
In-Line

Delta™ Drip PC

Pressure Compensating Drip Emitters

FEATURES and BENEFITS


- Turbulent flow path pressure compensating drip emitters with pre-defined flow rates.
- Suit installations where slopes and changes of water pressure would otherwise require complex design systems and where uniform flow rates are required.
- Two Spike versions available:
 1. End-Line with 4.5 mm Inlet Barb
 2. In-Line with 4.5 mm Inlet & Outlet Barb
- Three flow rates available for each spike type, Colour coded for easy identification:
 - 2 l/h (**Red**), 4 l/h (**Black**) and 8 l/h (**Green**)

APPLICATIONS

- May be used for vegetable patches, home gardens, nurseries, balconies and patios.



PERFORMANCE DATA			Delta™ Drip Spike PC		
			End-Line & In-Line		
			2 l/h	4 l/h	8 l/h
DRIPPERS		PRESSURE	FLOW	FLOW	FLOW
		(bar)	(l/h)	(l/h)	(l/h)
	Pressure Compensating	1.0	1.84	4.31	7.40
		1.5	1.94	3.97	7.30
		2.0	1.99	3.85	7.45
		2.5	2.03	3.82	7.84
		3.0	1.98	3.72	8.02
	Minimum Cross-Section		0.6 x 0.8	0.8 x 0.95	1.0 x 1.1
Recommended operating pressure 1.0 bar to 3.0 bar					

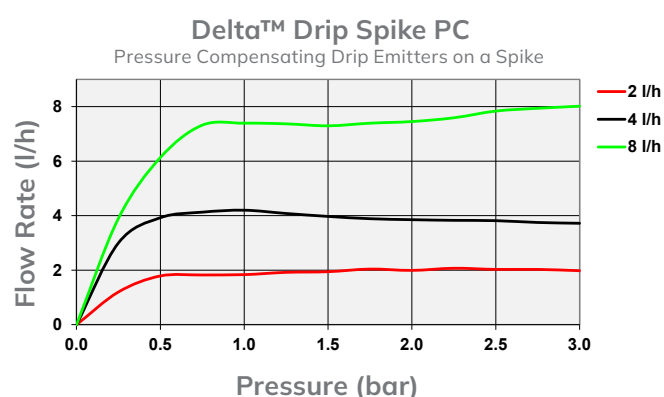

FILTRATION REQUIREMENTS

- Drip Emitters: 100 microns (150 mesh)

Delta™ Drip Spike PC							
Connection Type		End-Line			In-Line		
PACKAGING							
		2 l/h	4 l/h	8 l/h	2 l/h	4 l/h	8 l/h
Order Codes	Packs	202744	202754	202764	202774	202784	202794
	Bulk	020274	020275	020276	020277	020278	020279
Quantity per Bag	Packs	25					
	Bulk	1250					
Bags per Carton	Packs	50					
	Bulk	1					
Weight per Carton (kg)	Packs	11.6			11.8		
	Bulk	11.4			11.5		
Base Inlet Connection		4.5 mm Barb					
Dimensions Assembled (mm)	Height	144					
	Width	28			38		
	Depth	17					
	Weight (g)	8.3			8.4		
Material		U.V. Stabilized					

